

S/ ROW STRAIGHT BREAKAWAY HEADER




5071 SERIES. 5.08mm(0.200"). Square Pin. For PCB Solder

Features

- Available in 2 through 20 circuits
- Insulator Material: LCP UL 94V-0
- 1.14mm(.045") square pin in finned brass
- Easy breakaway to desired circuits
- Mates with 5070 series headers
- With standoff minimise flux retention

Dimensional Information

Ordering and Dimensional Information

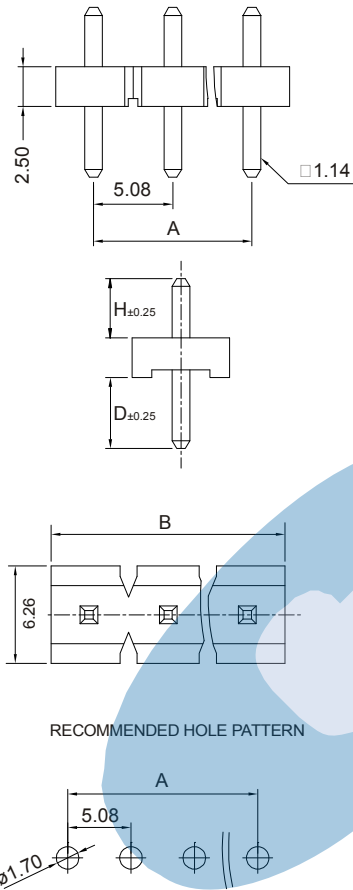

Circuit Size	Part Number	Dimensions	
		A	B
02	5071-202C	5,08(0,200)	10,16(0,400)
03	5071-203C	10,16(0,400)	15,24(0,600)
04	5071-204C	15,24(0,600)	20,32(0,800)
05	5071-205C	20,32(0,800)	25,40(1,000)
06	5071-206C	25,40(1,000)	30,48(1,200)
07	5071-207C	30,48(1,200)	35,56(1,400)
08	5071-208C	35,56(1,400)	40,64(1,600)
09	5071-209C	40,64(1,600)	45,72(1,800)
10	5071-210C	45,72(1,800)	50,80(2,000)
11	5071-211C	50,80(2,000)	55,88(2,200)
12	5071-212C	55,88(2,200)	60,96(2,400)
13	5071-213C	60,96(2,400)	66,04(2,600)
14	5071-214C	66,04(2,600)	71,12(2,800)
15	5071-215C	71,12(2,800)	76,20(3,000)
16	5071-216C	76,20(3,000)	81,28(3,200)
17	5071-217C	81,28(3,200)	86,36(3,400)
18	5071-218C	86,36(3,400)	91,44(3,600)
19	5071-219C	91,44(3,600)	96,52(3,800)
20	5071-220C	96,52(3,800)	101,60(4,000)

C = Pin Length

- C = 1. Dim. H= 3.80 mm. ; D = 4.55 mm.
- C = 2. Dim. H=19.50 mm. ; D = 11.00 mm.
- C = 3. Dim. H=14.20 mm. ; D = 3.00 mm.
- C = 4. Dim. H=21.50 mm. ; D = 11.00 mm.