



ICOP-6021
4MB/2S/GPIO/DOC

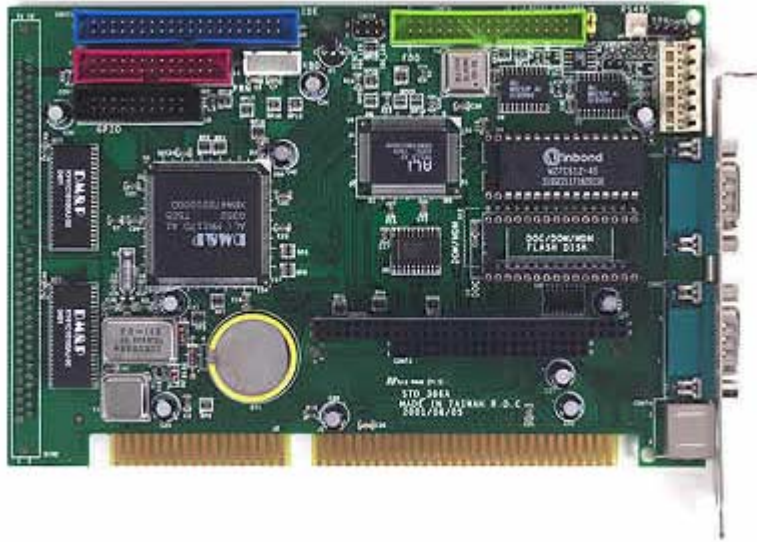

Specifications:

SoC	DM&P(ALi) M6117D System-on-Chip CPU 386SX-40MHz Real Time Clock with Lithium Battery Backup
Bus	PC/104 standard compliant
BIOS	AMI BIOS
System Memory	Onboard 4MB EDO RAM
Watchdog Timer	Software programmable from 30.5 us to 512 seconds
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) PQI DiskOnModule (16MB and above) M-System DiskOnChip 2000 (16MB and above) Winbond DIP Package Flash W29C040 (512KB)
I/O Interface	Enhanced IDE port x1 FDD port x1 RS-232 port x1 RS-232/485 port x1 Parallel port x1 16-bit GPIO port x1
Connectors	2.54mm 40-pin box header for IDE x1 2.54mm 34-pin box header for FDD x1 32-pin DIP socket for DOC x2 2.54mm 26-pin box header for Printer x1 2.54mm 20-pin box header for 16-bit GPIO x1 6-pin P8 Power connector for Power Input x1 2.54mm 5-pin box header for Keyboard x1

	2.54mm 2-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 External 9-pin D-Sub male connector for RS-232 x2 External Mini DIN connector for Keyboard/Mouse x1
Power Requirement	Single Voltage +5V @450mA
Weight	185g
Board Size	184 X 122mm (7.24 x 4.8 inches)
Operating Temperature	-20°C ~ +70°C



Accessory Cables

AT BUS



PRINT+F



YKB

