



Vortex86-6075L2

1S/3USB/VGA/2LAN

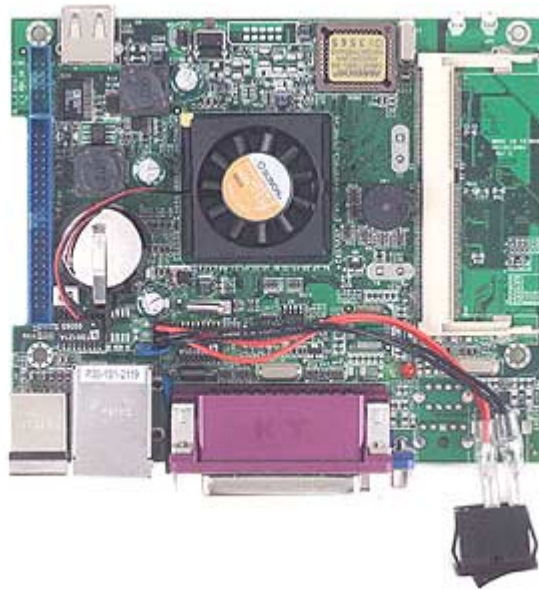

Specifications:

SoC	DM&P(SiS) Vortex86ä System-on-Chip CPU-166MHz Real Time Clock with Lithium Battery Backup
System Bus	32-bit PCI Bus
BIOS	AMI BIOS
System Memory	144-pin SODIMM socket x1, up to 128MB SDRAM
Watchdog Timer	Software programmable from 4ms to 1hour
VGA	AGP Rev.2.0 compliant Shared system memory up to 64MB (Default 8 MB) Support resolution up to 1,280x1,024 true colors VGA interface support
LAN	Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) PQI DiskOnModule (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x1 Parallel port x1 USB port x3 (Ver 1.1) 10/100Mbps Ethernet port x2
Connectors	144-pin socket for SODIMM x1 2.0mm 44-pin box header for IDE x1 2.0mm 10-pin box header for RS-232 x1 External 25-pin D-Sub female connector for Printer x1

	External 15-pin D-Sub female connector for VGA x1 External RJ-45 connector for Ethernet x2 External USB connector x3 External Mini DIN connector for Keyboard/Mouse x2 External DC Jack for Power Adapter x1 External Button for Re-set x1
Power Requirement	Single Voltage +5V @1A
Weight	210g
Board Size	133 X 111mm (5.23 x 4.37 inches)
Operating Temperature	-20°C ~ +70°C

