


Vortex86-6076

128MB/2S/2USB/VGA/AUDIO/LAN

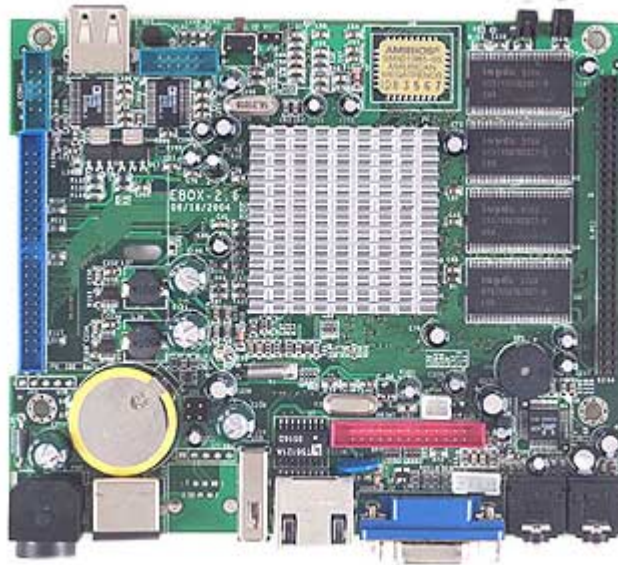

Specifications:

SoC	DM&P(SiS) Vortex86™ System-on-Chip CPU-200MHz Real Time Clock with Lithium Battery Backup
Bus	32-bit x-PCI interface, compatible with PCI Rev.2.2, PC 98/99
BIOS	AMI BIOS
System Memory	Onboard 128MB SDRAM
Watchdog Timer	Software programmable from 4ms to 1 hour
VGA	AGP Rev.2.0 compliant Shared system memory up to 64MB (Default 8 MB) Support resolution up to 1,280x1,024 true colors VGA interface support
LAN	Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Audio	Fully compliant with AC97 V2.1 Hardware DirectSound accelerator
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) PQI DiskOnModule (16MB and above)
I/O Interface	Enhanced IDE port x1 RS-232 port x2 Parallel port x1 USB port x2 (Ver 1.1) 10/100Mbps Ethernet port x1
Connectors	2.0mm 64-pin socket for 32-bit x-PCI interface 2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 10-pin box header for RS-232 x2 2.0mm 4-pin wafer for Line-in x1 2.54mm 2-pin header for Reset x1 External 15-pin D-Sub female connector for VGA x1

	External RJ-45 connector for Ethernet x1 External USB connector x2 External 6-pin Mini DIN connector for Keyboard x1 External 6-pin Mini DIN connector for Mouse x1 PhoneJack-S for Line-out/MIC-in x2
Power Requirement	Single Voltage +5V @1.2A
Weight	140g
Board Size	133 X 111mm (5.24 x 4.37inches)
Operating Temperature	-20°C ~ +70°C