


ROBO-6730VLA

Ultra Low Voltage Intel® Celeron® M processor based PICMG SBC with VGA and LAN

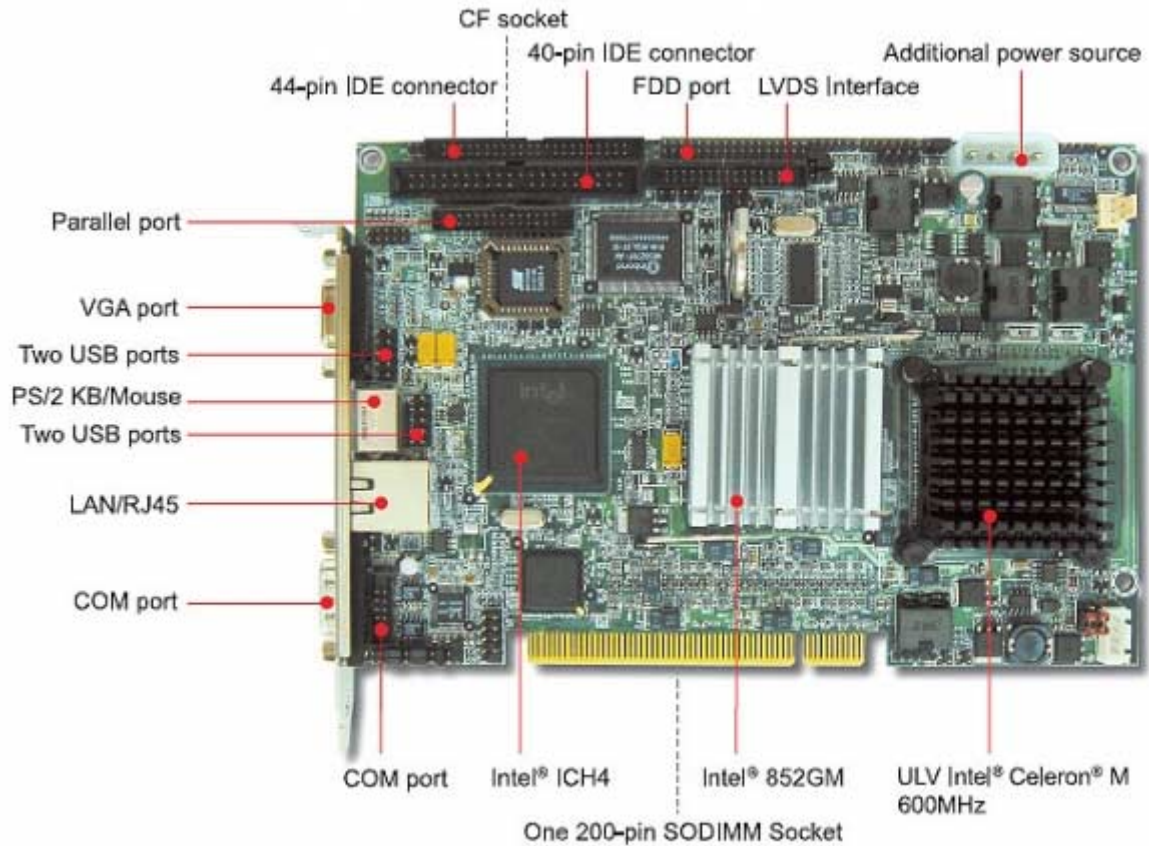

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

FEATURES

- Fanless solution with on-board Ultra Low Voltage Intel® Celeron® M 600MHz processor
- Support dual display function via VGA and LVDS output
- Perfect engine of slim computer with LVDS Interface LCD panel
- On-board Intel® 10 BASE-T/100BASE-TX Fast Ethernet
- One SODIMM socket at the rear supports up to 1 GB system memory
- One Type II Compact Flash at the rear supports up to 1 GB flash disk for installation OS without hard drive
- Auto Codec '97 (AC'97) 2.2 for a high quality audio architecture
- PCI bus interface for higher flexibility and expandability