


ROBO-8715VG2A

Intel® Pentium® 4 or Celeron®(D) processor based PICMG 64-bit SBC with DDR SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB 2.0

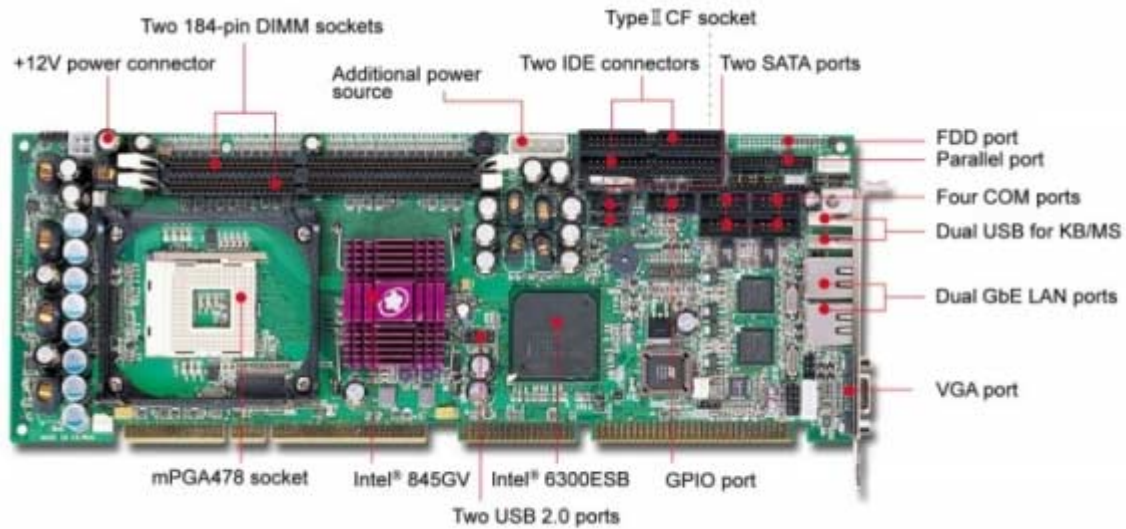

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

FEATURES

- External bus supports up to 64-bit/66 MHz PCI-X bus for driving higher speed line cards
- High quality and reliable design for wider range Intel® Pentium® 4/Celeron® (D) (0.13 micron & 90 nm process) processor support mission critical operation
- Support Mobile Intel® Pentium® 4-M processor for low power consumption application
- Dual on-board Gigabit Ethernet for network redundancy application
- Standard features for embedded system deployment like H/W monitoring, WDT and SSD