


ROBO-8716VG2A

Intel® Pentium® 4 or Celeron® (D) processor based PICMG 1.2 (ePCI-X) SHB with DDR SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB 2.0

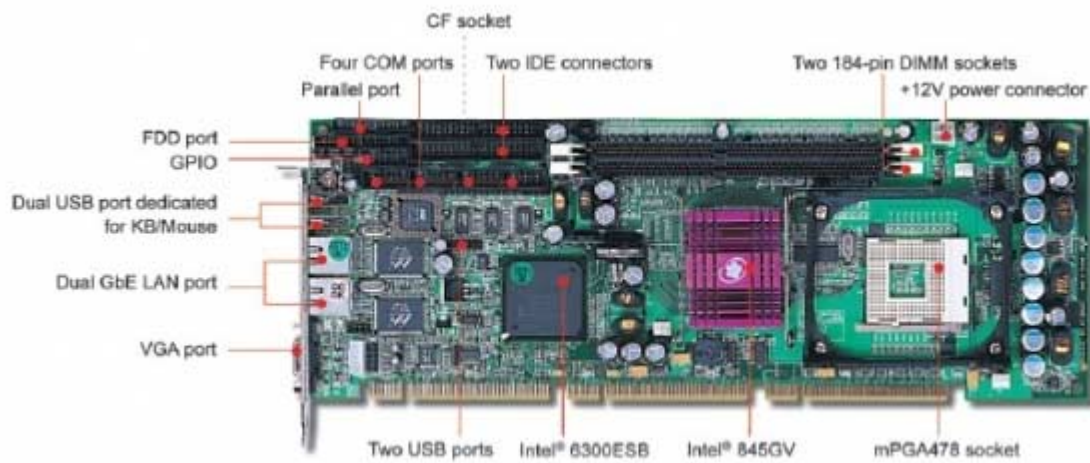

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

FEATURES

- PICMG 1.2 SHB supports one PCI and one PCI-X (66MHz only); independent architecture of these two buses increase total bandwidth of expansion
- High quality and reliable design for wider range Intel® Pentium® 4/Celeron® (D) (0.13 micron & 90 nm process) processor support mission critical operation
- Support Mobile Intel® Pentium® 4-M processor for low power consumption application
- Dual on-board Gigabit Ethernet for network redundancy application
- Dual SATA port supports higher throughput storage devices
- Standard features for embedded system deployment like H/W monitoring, WDT, SSD and Wake-On-LAN