


ROBO-8717VG2A

Intel® Core™ 2 Duo processor based PICMG SBC with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB

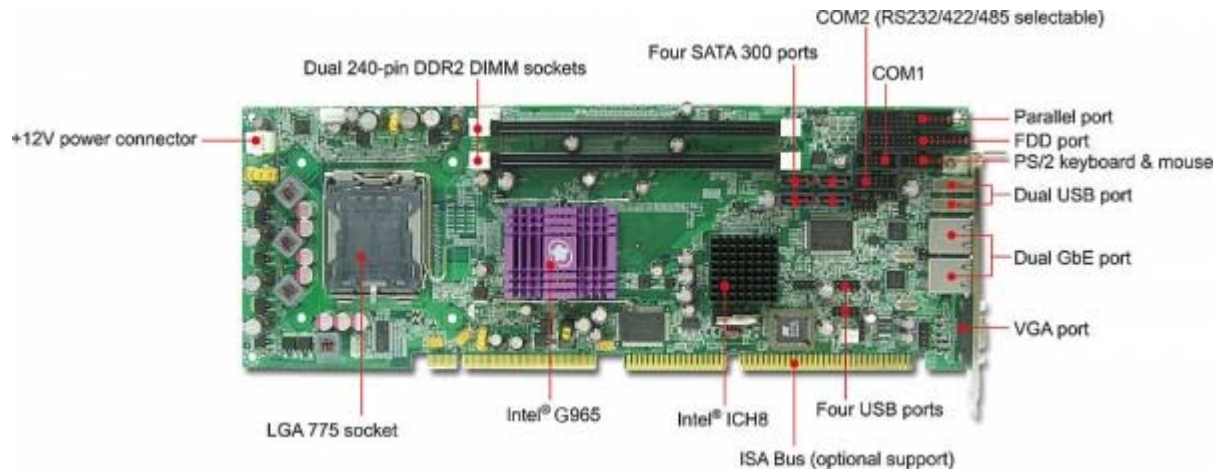

- [Ordering Guide](#)
- [Larger Image\(s\)](#)
- [Download](#)
- [Datasheet \(PDF\)](#)

FEATURES

- Support Intel® Core™ 2 Duo processor that only generates up to 65W TDP. Lower TDP than socket 478 Pentium® 4 processor makes the vertical mount slot board more reliability
- Low profile processor cooler improve stability and reliability of whole system
- More features such as EM64T, EIST, XD & VT can be easily applied to system by changing processor
- Integrated Intel® GMA X3000 graphics engine that built with high grade display capability
- Lockable cable latched notches of SATA connector that secure connection in vibration condition