


## ROBO-8718UG2A

Intel® Pentium® M or Celeron® M processor based PICMG SBC with DDR2 533 SDRAM, PCI-E x16 VGA, Dual Gigabit Ethernet and Audio

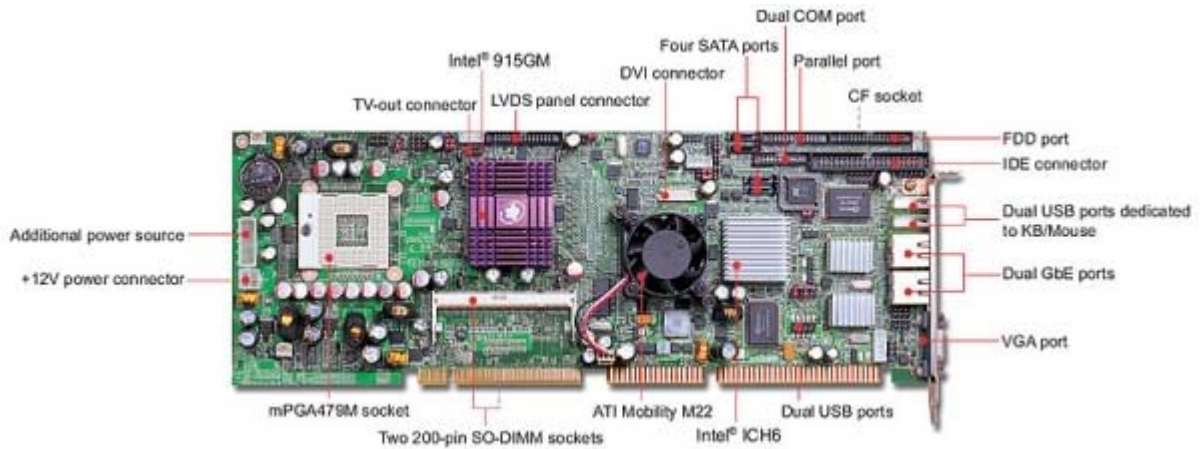

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

### FEATURES

- ROBO-8718 offers flexible 400MHz and 533MHz FSB selection of Intel® Pentium® M / Celeron® M that features high computing power with low heat
- Scalable graphics supports from Intel® 915GM featuring GMA 900 to ATI M22 graphics controller integrated 64MB display memory via PCI Express x16
- ATI M22 graphics support dual display configuration of LCD/CRT, TV/ CRT, LCD/LCD, LCD/TV displays
- High speed dual Gigabit Ethernet based on PCI Express x1, high bandwidth I/O interface
- Four SATA 150 ports for high speed storage interface and easy cable routing (RAID 0 & 1 or Intel® Matrix Storage)