


PECX-2730VL

Intel® LV Pentium® M or ULV Celeron® M processor based Intel® ECX SBC with DDR2 SDRAM, VGA/Panel and Fast Ethernet

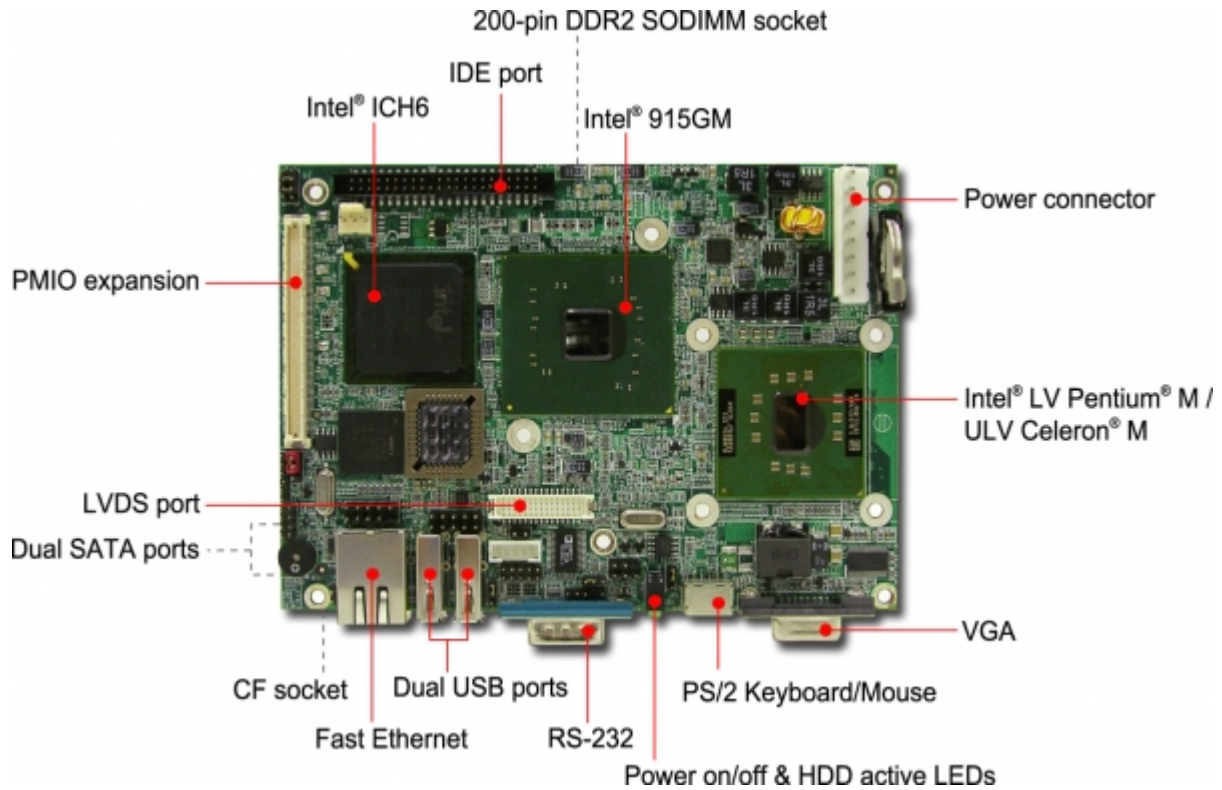

- [Ordering Guide](#)
- [Download](#)
- [Larger Image\(s\)](#)
- [Datasheet \(PDF\)](#)

FEATURES

- Intel® new initiative of compact 3.5" ECX form factor to fit in most wide range of system architecture
- Intel® low power chipset 915GM powered by low voltage Pentium® M with frequencies of up to 1.4 GHz with 2M L2 cache; optional fan-less ultra low power model with ULV Celeron® M 1.0GHz
- Dual display via CRT and LVDS interface or display interface that transformed by reserved SDVO part
- One PMIO expansion connector (with PCI, PCI Express x1, I2C, LPC, AC? 97, USB and SDVO interfaces) for versatile application

ORDERING GUIDE

Standard PECX-2730VL

3.5" ECX base on Intel® LV Pentium® M 1.4GHz processor with DDR2 SDRAM, VGA/Panel and LAN

PECX-2730VL-1G

3.5" ECX based on Intel® ULV Celeron® M 1.0GHz processor with DDR2 SDRAM, VGA/Panel and LAN