



5.7" PanelPC (AMD Geode LX-800 500MHz CPU)


Mechanical Design




Open Frame

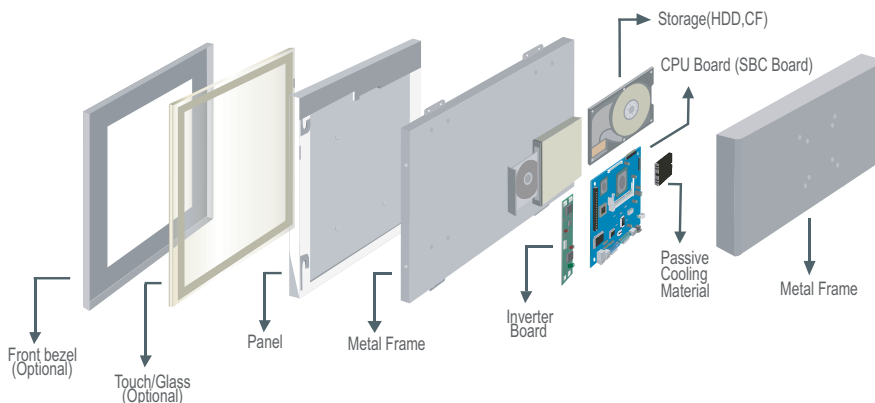

Modularized Construction

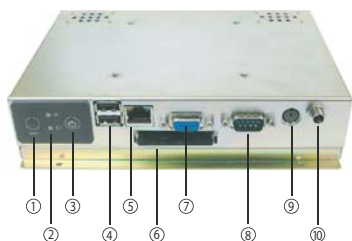

- | | |
|-----------------------|-------------------------------|
| 1. Power Reset Button | 7. VGA Conn. |
| 2. Power / HDD LED | 8. RS-232 Conn. |
| 3. Power On Button | 9. PS/2 |
| 4. USB | 10. DC-IN Lockable Power Jack |
| 5. RJ-45 | |
| 6. CF Socket | |

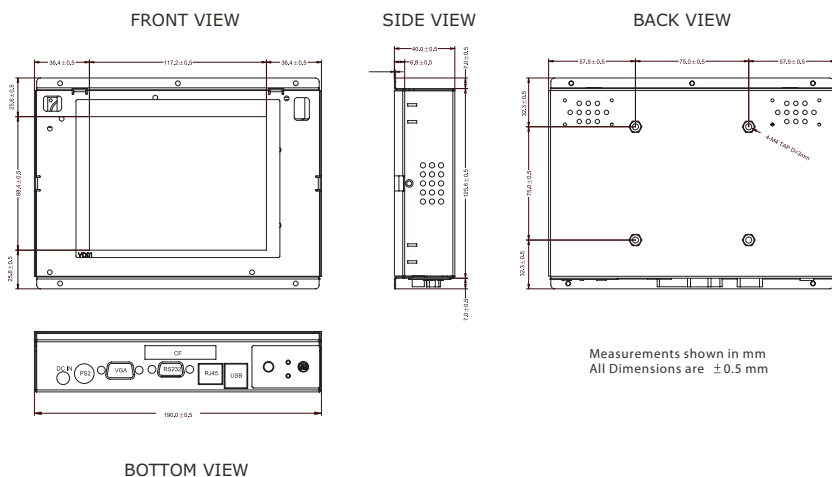

System Specifications

TFT Characteristics :

- Resolutions : 640 x 480
- Brightness : 300 cd/m² (typ.)
- Contrast Ratio : 200 : 1(typ.)
- Viewing Angles : 140(H);10(V)
- Max Colors : 262144((6bit/colors)

SBC Specifications :

- Processor : AMD Geode LX-800 500MHz CPU
- BIOS : Award 4Mbit Flash
- System Chipset : AMD CS5536 Companion Device
- Memory Slot : 1 x SODIMM, Max 1GB DDR400
- Graphic Chipset : AMD® Geode LX800 Integrated (64MB shared)
- IDE : 1 x IDE(UDMA 33)
- CF : 1 x Type I/II CFsocket
- KB/Mouse : 1 x PS/2
- Ethernet : 1 x RJ-45(Realtek RTL8110s 10/100 Mbps)
- VGA : 1 x VGA Conn.
- Audio : Built in AC97 codec
- USB : 4 x USB 2.0
- Serial : 3 x RS232, 1 x RS232/422/485
- Parallel : 1 x LPT
- Expansion Slot : 1 x MiniPCI
- Power Input : DC IN (Lockable, Power Jack)
- Certifications : CE, FCC, RoHS

Power Specifications :

- Power Input Temperature : DC IN (Lockable, Power Jack)
- Power Consumption : 12V, 20W (typ.)

Environment Considerations :

- Operating Temperature : 0 deg.C to 45deg.C
- Operating Humidity : 30% to 90% (non condensing)

Output Connectors :

- Ethernet LAN : 1 x RJ45-10/100Mbps
- Keyboard / Mouse : 1 x PS/2
- COM : 1 x RS232 9P DSUB(male)
- USB : 2 x USB Type-A Receptacle
- VGA Out : 1 x VGA 15P DSUB(female)
- CF : 1 x Type I/II Socket

Order Options :

SBC	PANEL PC
CPU : AMD LX-800 500MHz*	<u>Mechanical</u> : Open Frame
RAM : 256 MB DDR* 512 MB DDR(Optional) 1 GB DDR(Optional)	Panel Mount (5mm bezel) IP65 (10mm bezel) Chassis
Storage : 1 GB Compact Flash*	<u>Touch OS</u> : 4 Wires Resistive(Optional) Windows XPE(Optional) Windows XP (Optional) Linux(Optional)
* Default	

Accessories :

- External Power Supply 60W w/power cord
- Y Cable for Keyboard / Mouse